

Product data sheet

Specifications



Monolithic tower lights, Harmony
XVG, 60mm, red orange green blue,
steady light, buzzer, aluminium tube,
fixing plate, IP42, 24V AC/DC

XVGB4SH

Main

Range of product	Harmony XVG
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	4 illuminated units
Material	PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube
Mounting diameter	60 mm
Component name	XVG
Device mounting	Tube mounting with fixing plate
Light source	LED steady red LED steady green LED steady amber LED steady blue
Light block color	Red/orange/green/blue
Indicator bank base type	Base with integrated buzzer

Complementary

rated supply voltage	24 V AC/DC
Cable cross section	0.33 mm ²
Discrete output type	PNP and NPN
[Uimp] rated impulse withstand voltage	0.5 kV
Current consumption	207 mA
Noise level	85 dB
Power consumption in W	4.8 W
Fundamental frequency	2.64 kHz
Net weight	0.41 kg

Environment

Product certifications	CE EAC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
IP degree of protection	IP42

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.3 cm
Package 1 Width	14.1 cm
Package 1 Length	55.0 cm
Package 1 Weight	603.0 g
Unit Type of Package 2	S06
Number of Units in Package 2	30
Package 2 Height	73.5 cm
Package 2 Width	60.0 cm
Package 2 Length	80.0 cm
Package 2 Weight	29.0 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) 36

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again


Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back No

Dimensions Drawings


Dimensions

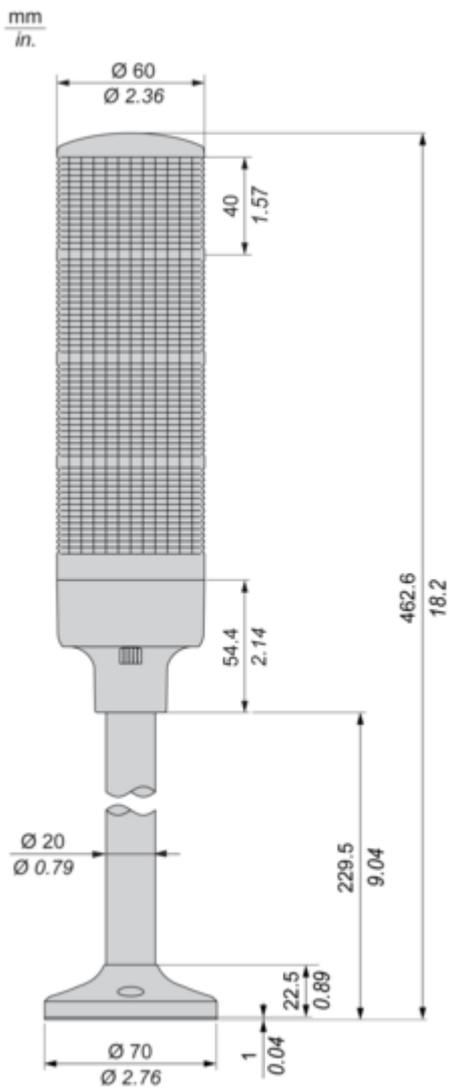

Mounting and Clearance

Mounting


Ø54 mm/2.13 in., Standard

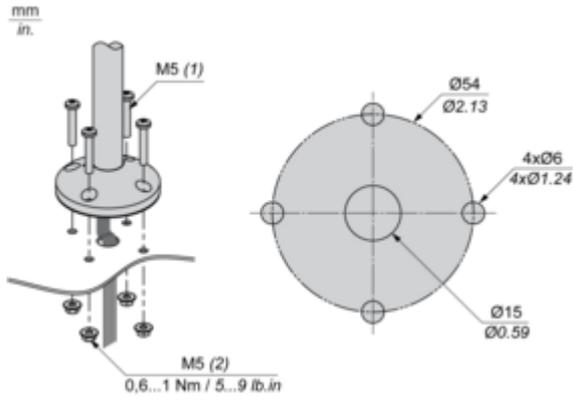

- (1) Thickness + 10 mm/0.39 in.
- (2) Hexagon Nut with flange

Connections and Schema

Wiring

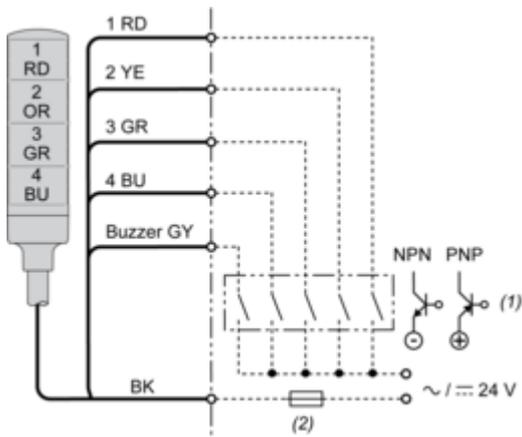

(1) "ON" for lighting and/or applying continuous sound.

(2) Fuse (rated current: 0.5 A)

RD : Red

YE : Yellow

GR : Green

BU : Blue


GY : Grey

OR : Orange

BK : Black


Technical Illustration

Dimensions

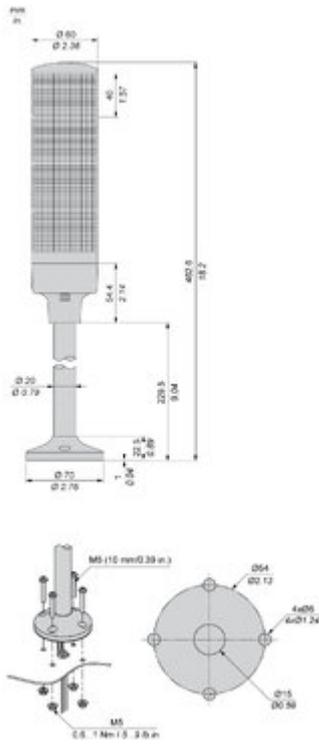

Technical Illustration

Wiring diagram

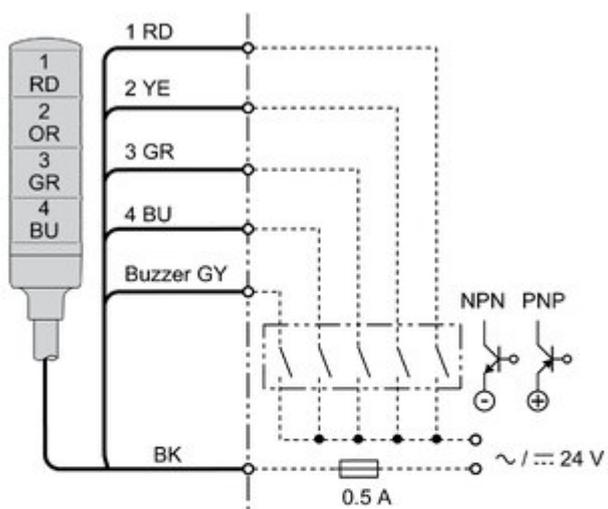

- RD = ●
- YE = ●
- GR = ●
- BU = ●
- GY = ●
- OR = ●
- BK = ●

Offer Marketing Illustration

Product benefits / Features

The infographic features a central image of a vertical signal tower with four colored lights (red, yellow, green, blue) and a grey base. Surrounding this central image are five circular icons, each with a corresponding text description of a feature. The background is a solid green color.

Features

Easy Harmony XVG

- Pre-assembled and Pre-wired with color code**: Represented by an icon of a terminal block with colored wires.
- Integrated 85dB buzzer**: Represented by a speaker icon.
- Wide mounting options for all kind of applications**: Represented by a gear icon.
- Less maintenance thanks to LEDs**: Represented by an icon of a hand pointing to a light source.
- Long distance machine status by clear lens design**: Represented by an eye icon.

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Easy Harmony XVG

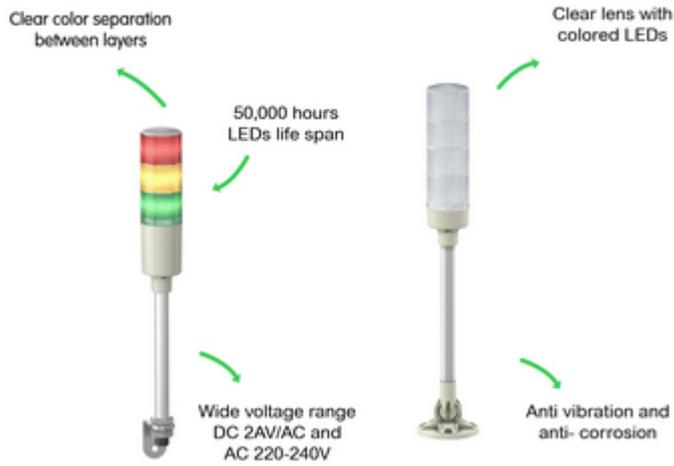


Image of product / Alternate images

Alternative





